

Hydraulic Driven Reciprocating & Rotary Screw Compressors



Industrial Gold
Quality Air Compressor at a Great Price.

industrialgold.com ■ 1-800-531-9656 ■ Fax 972-352-6364



Reciprocating Compressors

Features:

- Heavy duty industrial reciprocating compressor pump
- Intake filter silencer
- Disc & spring valves
- Hydraulic fluid flow regulator
- Hydraulic fluid pressure regulator
- Hydraulic fluid bypass valve
- Steel mounting plate
- External on/off switch
- All hydraulic fluid and air connections in 1 place
- Easy to remove compressor cover
- Low rpm compressor pump
- 12 volt control system*
- Load/unload operation
- CAS SMART fluid control
- System vibration mounting pads
- ASME/CRN certified safety valves

Options:

- Cover color change
- Compressed air cooler
- Tank mounted
- Hydraulic fluid axillary cooler
- 24 Volt control operation
- 110 Volt control operation
- Cold weather heating package
- High ambient temperature cooling package



Model	CFM @ 100PSI	CFM@150PSI	Hydraulic PSI Required	GPM Hydraulic Fluid Required
H-BM14	17	14	2250	8
H-BM22	25	22	2250	10
H-BM40	46	39	2250	12
H-BM80	90	80	2250	30

Control voltage connection to be supplied from vehicle or equipment compressor is mounted to . DO NOT LET Hydraulic Fluid exceed 190F


Rotary Screw Compressors

Features:

- Heavy duty industrial rotary screw airend
- Hydraulic fluid flow regulator
- Hydraulic fluid pressure regulator
- Hydraulic fluid bypass valve
- Steel mounting plate
- External on/off Switch
- All hydraulic fluid and air connections in 1 place
- Easy to remove compressor cover
- 12 volt control system*
- Load/unload operation
- CAS SMART fluid control
- System Vibration mounting pads
- ASME/CRN certified safety valves
- Spin-on oil filter & separator

Options:

- Cover color change
- Compressed air cooler
- Tank mounted
- Hydraulic fluid axillary cooler
- 24 Volt control operation
- 110 Volt control operation
- Cold weather heating package
- High ambient temperature cooling package

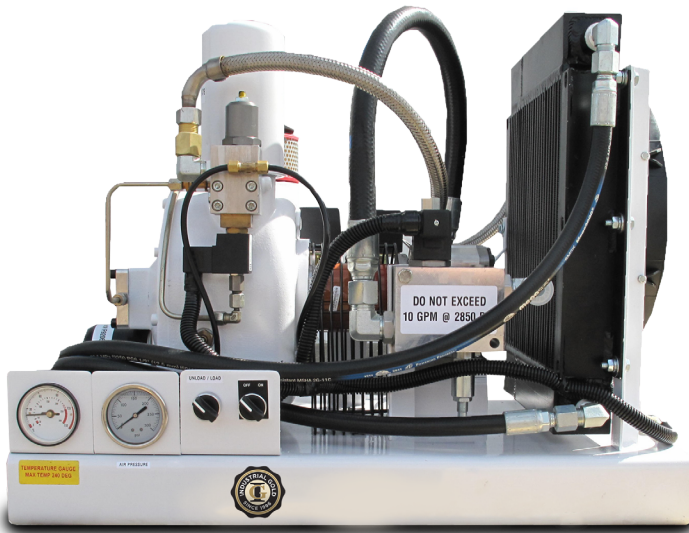

Model	CFM @ 100PSI	CFM@150PSI	Hydraulic PSI Required	GPM Hydraulic Fluid Required
H-BM40R	46	38	2250	12
H-BM60R	68	60	2250	20
H-BM120R	130	120	2250	30
H-BM185R	195	185	2250	55

Control voltage connection to be supplied from vehicle or equipment compressor is mounted to . DO NOT LET Hydraulic Fluid exceed 190F



Quality Air Compressor at a Great Price.

2626 Skyway Drive
Grand Prairie, TX, 75052

417-206-6353

800-742-3071

Fax 417-206-6336